




4000 Series

Diesel Engine - Electro Unit 4012TWG2

1154 kWm 1500 rev/min
1154 kWm 1800 rev/min

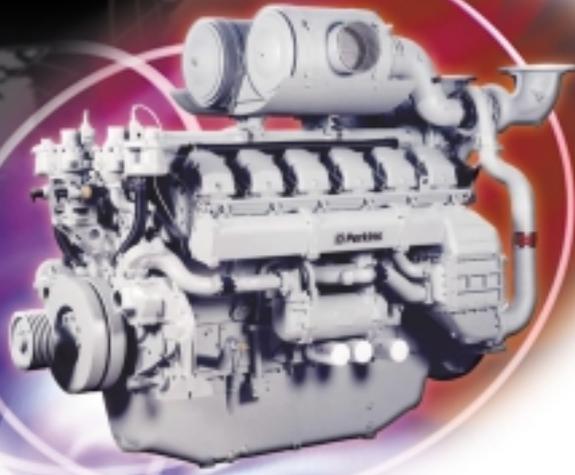

The Perkins 4000 Series family of 8, 12 and 16 cylinder diesel engines was designed in advance of today's uncompromising demands within the power generation industry and includes superior performance and reliability.

The 4012TWG2 is a turbocharged air to water charge cooled, 12 cylinder vee form diesel engine. Its premium design and specification features provide economic and durable operation as well as exceptional power to weight ratio, improved serviceability, low gaseous emissions, overall performance and reliability essential to the power generation market.

Economic power

Individual 4 valve cylinder heads give optimised gas flows, while unit fuel injectors ensure ultra fine fuel atomisation and hence controlled rapid combustion for efficiency and economy.

Commonality of components with other engines in 4000 Series family allows reduced parts stocking levels.

Reliable power

Developed and tested using latest engineering techniques.

Piston temperatures are controlled by an advanced gallery jet cooling system.

All engines are tolerant of a wide range of temperatures without derate.

Service is provided through the extensive Perkins network of over 4000 distributors and dealers worldwide.

Clean, efficient power

Exceptional power to weight ratio and compact size for easier transportation and installation.

Designed to provide excellent service access for ease of maintenance.

Engines designed to comply with major international standards.

Low gaseous emissions for cleaner operation.

Engine Speed rev/min	Type of Operation	Typical Generator Output (Net)		Engine Power			
				Gross		Net	
		kVA	kWe	kWm	bhp	kWm	bhp
1500	Baseload Power	989	792	878	1177	825	1106
	Prime Power	1258	1002	1097	1471	1044	1400
	Standby (maximum)	1385	1108	1207	1619	1154	1547
1800	Baseload Power	989	792	878	1177	825	1106
	Prime Power	1258	1002	1097	1471	1044	1400
	Standby (maximum)	1385	1108	1207	1619	1154	1547

The above ratings represent the engine performance capabilities within plus or minus 3% at the reference conditions equivalent to those specified in ISO 8528/1, ISO 3046/1, BS 5514/1.

Ratings conditions: 25°C air inlet temperature, barometer pressure 100kPa, relative humidity 30%. Please consult your distributor or the factory for ratings in ambient conditions.

Note: For full ratings please refer to Perkins Engines Company Limited. All electrical ratings are based on an average alternator efficiency and a power factor of 0.8.

Fuel specification: BS 2869 Class A1 + A2 or ASTM D975 No 2D.

Rating Definitions

Baseload Power: Power available for continuous full load operation. No overload is permitted.

Prime Power: Power available for variable load with an average load factor not exceeding 80% of the prime power rating in any 24 hour period. Overload of 10% permitted for 1 hour in every 12 hours operation at 1500 rev/min. No overload is permitted at 1800 rev/min.

Standby (maximum): Power available at variable load in the event of a main power network failure for a maximum of 500 hours per year. No overload is permitted.

4000 Series 4012TWG2

Standard Electro Unit Specification

Air Inlet

Mounted air filters and turbochargers - integral charge coolers

Fuel System

Unit fuel injectors with lift pump and hand stop control
Electronic governor to ISO 3046 Part 4 class A1
Full-flow spin-on fuel oil filters

Lubrication System

Wet sump with filler and dipstick
Full-flow spin-on oil filters
Engine jacket water/lub. oil temperature stabiliser

Cooling System

Twin gear driven circulating pumps
Two twin thermostats
Crankshaft pulley for fan drive

Electrical Equipment

24V starter motor and 24V/40A alternator with integral regulator and DC output
24V combined high coolant temperature/low oil pressure switch
Overspeed switch and magnetic pickup
Turbine inlet temperature shutdown switch
24V stop solenoid (energised to run)

Flywheel and Housing

Flywheel to SAE J620 size 18
SAE 00 flywheel housing

Optional Equipment

The following optional equipment is available to make up the specifications to Perkins ElectropaK specification:

Tropical radiator including: Water pipes, clips and hoses
Fan, fan guards and belts

Other optional extra equipment available

Twin heavy duty air cleaner – paper element with pre-cleaner
Changeover lubricating oil filters
Changeover fuel oil filters
Immersion heater with thermostat
Water pipes, clips and hoses for radiator
Air starters
Instrument panel


NB This list is not exhaustive, further options may be available to meet to particular applications on enquiry to Perkins Sales Department



Perkins Engines Company Limited

Peterborough PE1 5NA
United Kingdom
Telephone +44 (0)1733 583000
Fax +44 (0)1733 582240
www.perkins.com

All information given in this leaflet is correct at the time of printing but it may be changed subsequently by the Company

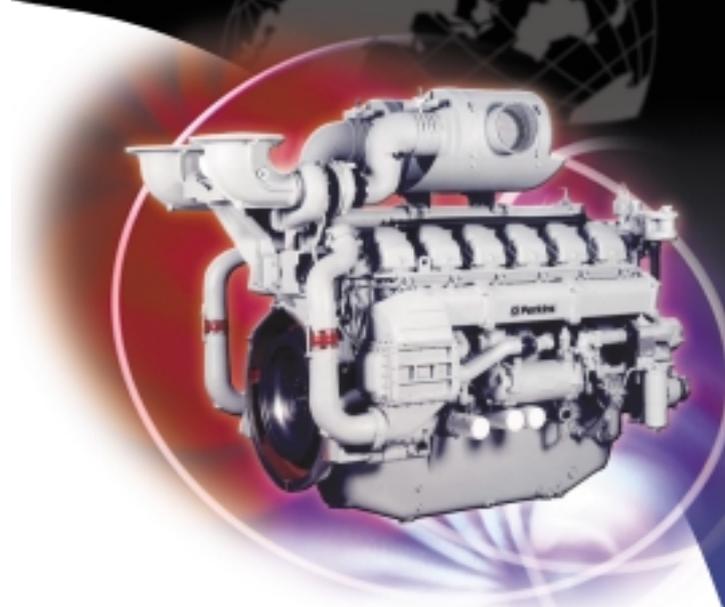


General Data

Number of Cylinders	12
Cylinder Arrangement	60° Vee form
Cycle	4-stroke
Induction System	Turbocharged Air to water charge cooled
Combustion System	Direct injection
Cooling System	Water-cooled
Displacement	45.842 litres
Bore and Stroke	160mm x 190 mm
Compression Ratio	13.6:1
Direction of Rotation	Anti-clockwise, viewed from flywheel end
Firing Order	1A, 6B, 5A, 2B, 3A, 4B, 6A, 1B, 2A, 5B, 4A, 3B

Total Lubrication System Capacity	177.6 litres	
	Electro Unit	ElectropaK
Total Coolant Capacity	73 litres	210 litres
Length	2731 mm	3790 mm
Width	1547 mm	1870 mm
Height	2118 mm	2211 mm
Total Weight (Dry)	4400 kg	5320 kg

Fuel Consumption g/kWh		
Engine speed	1500 rev/min	1800 rev/min
At Standby Maximum rating	207	215
At Prime Power rating	205	211
At Baseload rating	204	212
At 75% of Prime Power rating	204	213
At 50% of Prime Power rating	210	223
At 25% of Prime Power rating	238	264

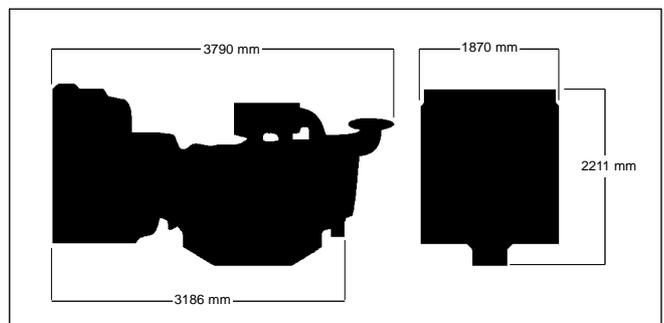

Distributed by